


Accelerometer KS10

- Piezoelectric accelerometer
- Acquisition of structure-borne noise vibration
- Measurement on machinery and facility
- Recognition of possible machinery breakdown
- Variable cable layout deliverable

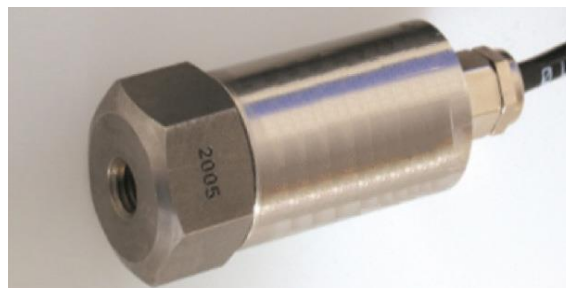

Technical Specifications

Measurement Axis	1	m/s ²
Sensitivity	100 ± 10%	mV/g*
Dynamic Range	± 50	g*
Supply Voltage	18 – 28	Volt DC
Current Consumption	1 – 8	mA
Lower Cut-Off Frequency Upper Cut-Off Frequency	0,5 15 000	Hz Hz
Resonance Frequency	> 14	kHz
Weight (without cable)	90	Gram
Temperature Coefficient	-50 / + 121	°C
Degree of protection of enclosure	68	IP
Dimensions (D x L)	21 x 35	mm
Width across flat	22	mm
Material of housing	Stainless Steel	
Mounting	M8x1,25	

* 1g = 9,81 m/s²

DMT GmbH & Co. KG
Machine Diagnosis &
Geoinstruments
Am TÜV 1
45307 Essen, Germany
T +49 201 172-1441
E products@dm-group.com
dm-group.com



DIN EN ISO 9001
DIN EN ISO 14001
DIN ISO 45001

TÜVNORDGROUP